


**NOTES:**

1. MATERIAL: ABS  
OTHER MATERIALS AVAILABLE
2. SIGNAL CONTACT PLATING: SOFT NICKEL, THEN SOFT GOLD
3. PIN SETBACK: 0.08" [2.1MM]  
EN 60601 TOUCHPROOF
4. GENERAL PERFORMANCE (CONTACT P1T FOR TEST CONDITIONS)  
EXTRACTION FORCE: .87 LB AVERAGE (3.9 N)  
LIFE CYCLE: 1000+ INSERTION CYCLES  
HIPOT: 1000 VAC between contacts  
MAX. CURRENT: 8 AMPS
5. UL94 HB
6. WAVE SOLDERABLE
7. MATES WITH 44-SERIES & 444 PLUGS

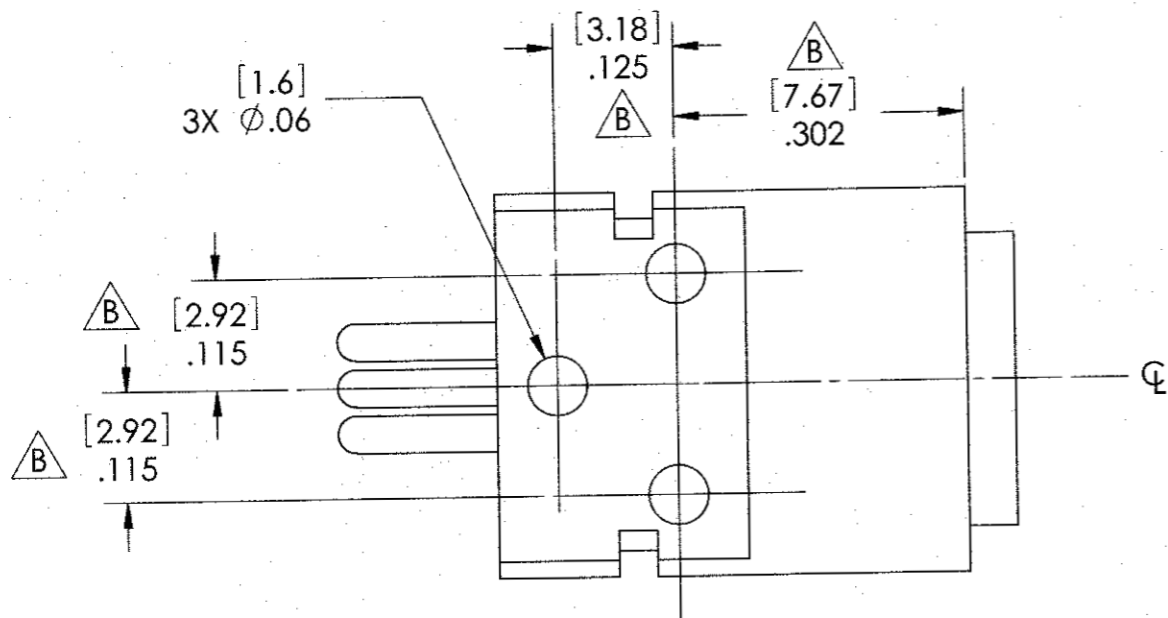

TOLERANCES UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN INCHES DIMENSIONS IN [ ] METRIC		APPROVALS	DATE	<p><b>P Technologies</b> BECAUSE EVERYTHING CONNECTS 6591 Merriman Road, Roanoke, VA 24018 Phone: 540-772-7950 Fax: 540-989-7519</p>
FRACTIONAL ±1/64	DECIMAL .00 ±.01 [.25mm] .000 ±.005 [.127mm]	DRAWN T. STUMP	8/22/12	
ANGULAR ±.5°		CHECKED <i>T. Stump</i>	7/8/2020	
		PROJ ENGR		
REV DESCRIPTION		APPROVED <i>L. Sperry</i>	7/9/2020	TITLE JACK, 1MM, 3 PIN, STRAIGHT
REVISIONS		PROJECT FSCM		SCALE 5:1
B	REV PER ECO 28666 XZ 2/17/17	3/28/17	SLH	SIZE B
A	RELEASE PER ECO 18573 TAS 8/22/12	8/27/12	TAS	DWG 39111-50
REV		DATE	BY	REV B
				SHT 1 OF 1

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND MAY NOT BE ISSUED OR REPRODUCED, IN WHOLE, OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF P1 TECHNOLOGIES.