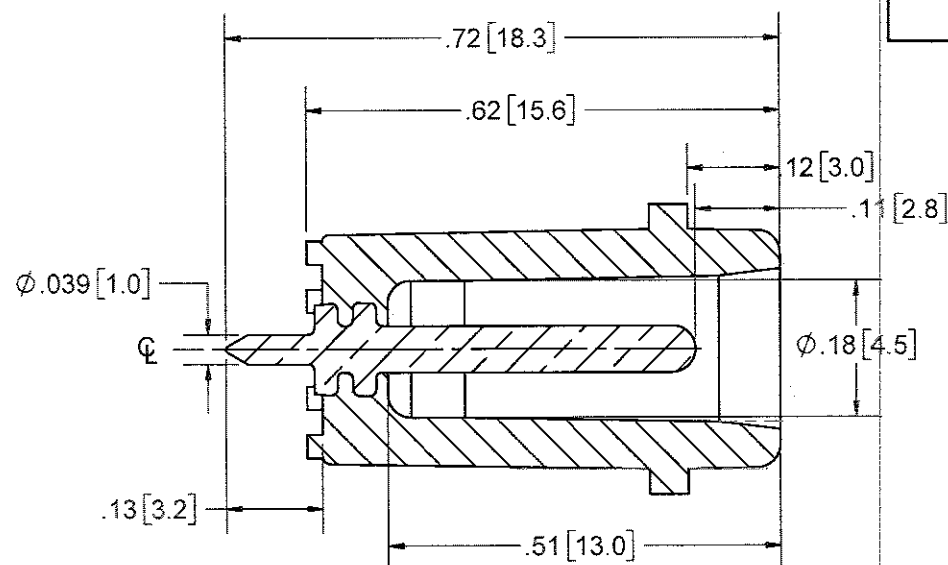
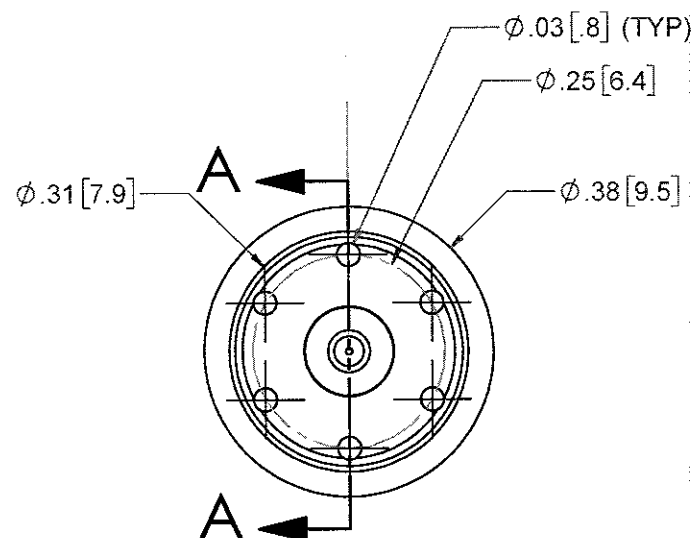
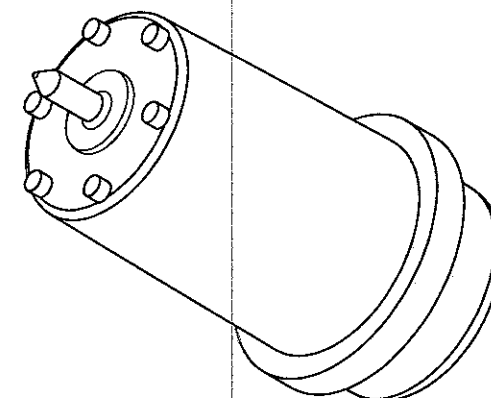


SECTION A-A
SCALE 4 : 1

NOTES:

1. MATERIAL: PBT, OTHER MATERIALS AVAILABLE
2. SIGNAL CONTACT PLATING: SOFT NICKEL, THEN SOFT GOLD
3. PIN SETBACK: 0.110" (2.8 mm) / EN 60601 TOUCHPROOF
4. GENERAL PERFORMANCE (CONTACT P1 FOR TEST CONDITIONS)
EXTRACTION FORCE: 3.0 LBS MINIMUM (13.3N)
LIFE CYCLE: 1000+ INSERTION CYCLES
MAX. CURRENT: 8 AMPS
5. OPERATING TEMPERATURE: +5° C to + 60° C
6. UL94 V-0/5V
7. WAVE SOLDERABLE
8. MATES WITH 441 (881), 503, 455, 592
9. DIN 42-802 Type BU

				TOLERANCES UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN INCHES DIMENSIONS IN [] METRIC		APPROVALS		DATE		 P Technologies BECAUSE EVERYTHING CONNECTS 6591 Merriman Road, Roanoke, VA 24018 Phone: 540-772-7950 Fax: 540-989-7519			
REV	DESCRIPTION	DATE	BY	FRACTIONAL ±1/64	DECIMAL .00 ±.01 [.25mm] .000 ±.005 [.127mm]	CHECKED	PROJ ENGR	8/4/22	8/5/22				
A	REL PER ECO 39329 MAB 8/4/22	8/30/22	SLA							TITLE JACK, 1.5mm TOUCHPROOF, PANEL MOUNT			
REVISIONS				ANGULAR ±.5°		APPROVED		8/5/22		SCALE 4/1			
THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND MAY NOT BE ISSUED OR REPRODUCED, IN WHOLE, OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF P1 TECHNOLOGIES.						PROJECT		FSCM		SIZE A	DWG 41114-50	REV A	SHT 1 OF 1