


AUX Views  
SCALE: 1:1

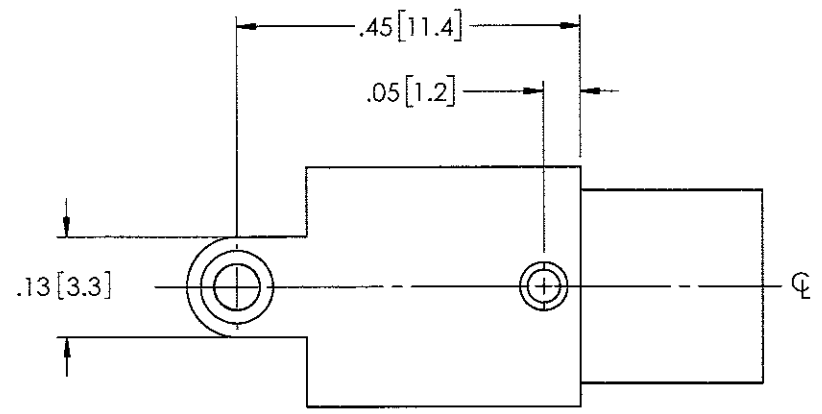

- NOTES:**
1. MATERIAL: PBT  
OTHER MATERIALS AVAILABLE
  2. SIGNAL CONTACT PLATING: SOFT NICKEL, THEN SOFT GOLD
  3. PIN SETBACK: 0.08" (EN 60601 TouchProof)
  4. GENERAL PERFORMANCE (CONTACT P1T FOR TEST CONDITIONS)  
EXTRACTION FORCE: 2-7 lbs  
LIFE CYCLE: 1000+ INSERTIONS  
HIPOT: 1000 VAC  
MAX. CURRENT: 8 A
  5. OPERATING TEMPERATURE: +5° C to + 60° C
  6. UL94 V-0/5V
  7. WAVE SOLDERABLE

2	1	BRASS	PIN, POI DWG 36651
1	AR	SEE OPTION BLOCK	JACK, BODY
ITEM	QTY	MATERIAL	DESCRIPTION

REV	DESCRIPTION	DATE	APPVD
B	Revise per ECO 24909 SLH 6-10-15	3/2/16	SLH
A	REL PER ECO 22882 XZ 8/1/14	8/12/14	SH

<b>TOLERANCES</b> UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN INCHES DIMENSIONS IN [ ] METRIC	
FRACTIONAL ±1/64	APPROVALS DRAWN XZHOU
DECIMAL .00 ±.01 [.25mm] .000 ±.005 [.127mm]	DATE 8/1/14
ANGULAR ±.5°	CHECKED T. Slump 7/7/20
	PROJ ENGR
	APPROVED K. Spady 7/10/2020
	PROJECT 7792

**P Technologies**  
BECAUSE EVERYTHING CONNECTS  
6591 Merriman Road, Roanoke, VA 24018  
Phone: 540-772-7950 Fax: 540-989-7519

TITLE JACK, PCB, 1.5mm, TOUCHPROOF WAVE SOLDER VERSION WITH POST		SCALE 4:1
SIZE A	DWG 41829-50	REV B
		SHT 1 OF 1

THIS DRAWING CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND MAY NOT BE ISSUED OR REPRODUCED, IN WHOLE, OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF P1 TECHNOLOGIES.